


Coaxial Cable Connector 21_SMA-50-2-15/111_N

Description

Straight cable jack

Interface standards

IEC 60169-15_MIL-STD-348A/310_CECC 22110

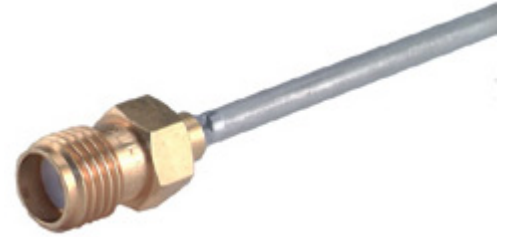

Technical Data

Electrical Data

Impedance 50 Ω
Interface frequency max. 18 GHz

Mechanical Data

Centre contact soldered
Outer 2contact soldered
Weight 0.0016 kg

Environmental Data

Operating temperature -65 °C to 165 °C
2011/65/EU (RoHS) compliant

Material Data

Piece Parts	Material	Surface Plating
Centre contact	Copper Beryllium Alloy	Gold Plating (Nickel underplated)
Outer contact	Copper Beryllium Alloy	Gold Plating (Nickel underplated)
Body	Copper Beryllium Alloy	Gold Plating (Nickel underplated)
Insulator	PFA / PTFE	

Related Documents

Outline drawing DOU-00005894
Catalogue drawing DOU-00005896
Assembly instruction DOC-0000179086

Ordering Information

Bulk 100 pcs package 21_SMA-50-2-15/111_NH
Single package 21_SMA-50-2-15/111_NE

Additional Information

Suitable cables EZ_86_TP_M17, SUCOFORM_86, MULTIFLEX_86