


## Coaxial Cable Connector 24\_SMA-50-2-15/111\_N

### Description

Straight bulkhead cable feed through

Interface standards

IEC 60169-15\_MIL-STD-348A/310\_CECC 22110

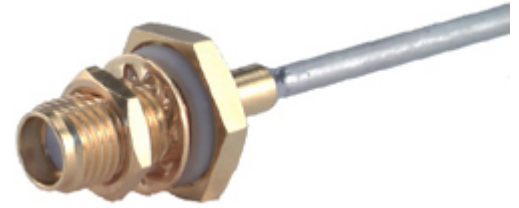

### Technical Data

#### Electrical Data

Impedance 50  $\Omega$   
Interface frequency max. 18 GHz

#### Mechanical Data

Centre contact soldered  
Outer 2contact soldered  
Weight 0.0036 kg

#### Environmental Data

Operating temperature -65 °C to 165 °C  
2011/65/EU (RoHS) compliant

#### Material Data

| Piece Parts    | Material               | Surface Plating                   |
|----------------|------------------------|-----------------------------------|
| Centre contact | Copper Beryllium Alloy | Gold Plating (Nickel underplated) |
| Outer contact  | Copper Beryllium Alloy | Gold Plating (Nickel underplated) |
| Body           | Copper Beryllium Alloy | Gold Plating (Nickel underplated) |
| Insulator      | PFA / PTFE             |                                   |
| Gasket         | VMQ (Silicone rubber)  |                                   |
| Fastening nut  | Brass                  |                                   |
| Washer         | Bronze                 |                                   |

### Related Documents

Catalogue drawing DCA-00008877  
Assembly instruction DOC-0000179086  
Mounting hole DOU-00008731

### Ordering Information

Single package 24\_SMA-50-2-15/111\_NE  
Bulk 100 pcs package 24\_SMA-50-2-15/111\_NH

### Additional Information

Suitable cables EZ\_86\_TP\_M17, SUCOFORM\_86, MULTIFLEX\_86