


## Coaxial Cable Connector 15\_BMA-50-1-15/111\_N

### Description

Straight panel cable plug

Interface standards

IEC 60169-33\_MIL-STD-348A/321

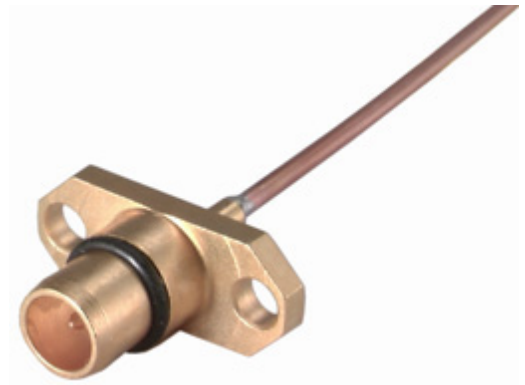

### Technical Data

#### Electrical Data

Impedance	50 $\Omega$
Interface frequency max.	18 GHz

#### Mechanical Data

Centre contact	soldered
Outer contact	soldered
Weight	0.0027 kg

#### Environmental Data

Operating temperature	-65 °C to 125 °C
2011/65/EU (RoHS - including 2015/863 and 2017/2102)	compliant

#### Material Data

Piece Parts	Material	Surface Plating
Centre contact	Copper Beryllium / Brass	Gold Plating (Nickel underplated)
Outer contact	Copper Beryllium Alloy	Gold Plating (Nickel underplated)
Body	Copper Beryllium Alloy	Gold Plating (Nickel underplated)
Insulator	PFA / PTFE	
Gasket	NR (Natural Rubber)	

### Related Documents

Outline drawing	DOU-00009871
Catalogue drawing	DCA-00009873
Assembly instruction	DOC-0000185128
Mounting hole	DOU-00009871

### Ordering Information

Single package	15_BMA-50-1-15/111_NE
----------------	-----------------------

### Additional Information

Suitable cables	EZ_47_TP_M17, SUCOFORM_47_CU
-----------------	------------------------------